

## SELECTING THE RIGHT OTDR

*Mario Simard, Product Manager*  
*Mike Harrop, Application Engineer*

The OTDR is a critical tool in the characterization and certification of fiber-optic links (multimode and singlemode LAN/Ethernet). When choosing an OTDR, it is important to select the specific OTDR performance and features needed to qualify these links accurately and to the required specification/standard.

There are a wide number of OTDR models available, addressing different test and measurement needs—from very simple fault finders to advanced OTDRs for link certification. To make the right choice, five fundamental parameters must be considered when purchasing an OTDR, as selecting a unit simply based on overall performance and price will lead to problems if the selected model is inappropriate for the application. A solid understanding of these parameters will help buyers make the right choice for their specific environment, and thus maximize productivity.

The key specifications that should be considered when purchasing an OTDR are the following:

- Dynamic range
- Dead zones (attenuation and event)
- Sampling resolution
- Ability to set pass/fail thresholds
- Post-processing and report generation

### Dynamic Range

This specification determines the total optical loss that the OTDR can analyze; i.e., the overall length of fiber link that can be measured by the unit. The higher the dynamic range, the longer the distance the OTDR can analyze. The dynamic range specification must be considered carefully for two reasons:

1. OTDR manufacturers specify dynamic range in different ways (playing with specifications like pulse width, signal-to-noise ratio, averaging time, etc.). Therefore, it is important to understand them thoroughly and avoid comparing apples and oranges.
2. Having insufficient dynamic range will result in the inability to measure the complete link length and, in many cases, affect the accuracy of the link loss, attenuation and far-end connector losses. A good rule of thumb is to choose an OTDR whose dynamic range is 5 to 8 dB higher than the maximum loss you will encounter.

For example, a singlemode OTDR with a dynamic range of 35 dB has a useable dynamic range of around 30 dB. Assuming typical fiber attenuation of 0.20 dB/km at 1550 nm and splices every 2 km (loss of 0.1 dB per splice), a unit such as this one will be able to accurately certify distances of up to 120 km.

Comparatively, a multimode OTDR with a dynamic range of 26 dB has a useable dynamic range of around 21 dB. Assuming typical attenuation of 0.5 dB/km at 1300 nm and two connector losses of about 1 dB each, this unit would be able to accurately certify distances of up to 38 km.

## Dead Zones

Dead zones originate from reflective events (connectors, mechanical splices, etc.) along the link, and they affect the OTDR's ability to accurately measure attenuation on shorter links and differentiate closely spaced events, such as connectors in patch panels, etc. When the strong optical reflection from such an event reaches the OTDR, its detection circuit becomes saturated for a specific amount of time (converted to distance in the OTDR) until it recovers and can once again measure backscattering accurately. As a result of this saturation, there is a part of the fiber link following the reflective event that can not be "seen" by the OTDR, hence the term dead zone.

When specifying OTDR performance, analyzing the dead zone is very important to ensure the whole link is measured. Two types of dead zones are usually specified:

1. **Event dead zone:** This refers to the minimum distance required for consecutive reflective events to be "resolved"<sup>1</sup>, i.e., to be differentiated from each other. If a reflective event is within the event dead zone of the preceding event, it will not be detected and measured correctly. Industry standard values range from 0.8 m to 5 m for this specification.

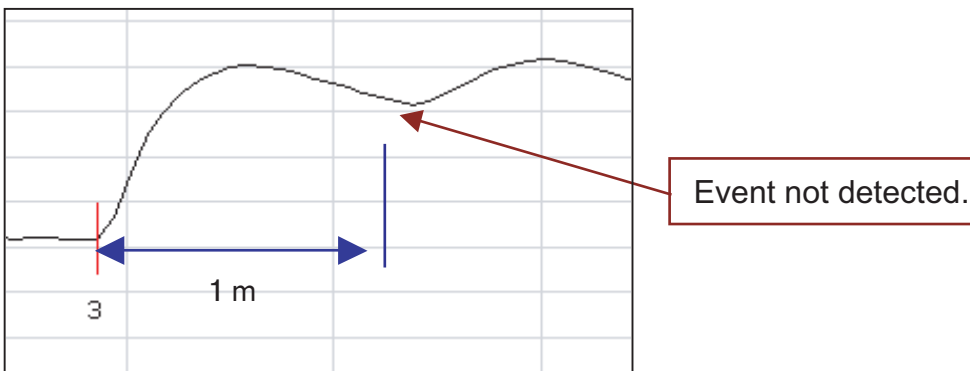


Figure 1. Common OTDR with 3 m event dead zone

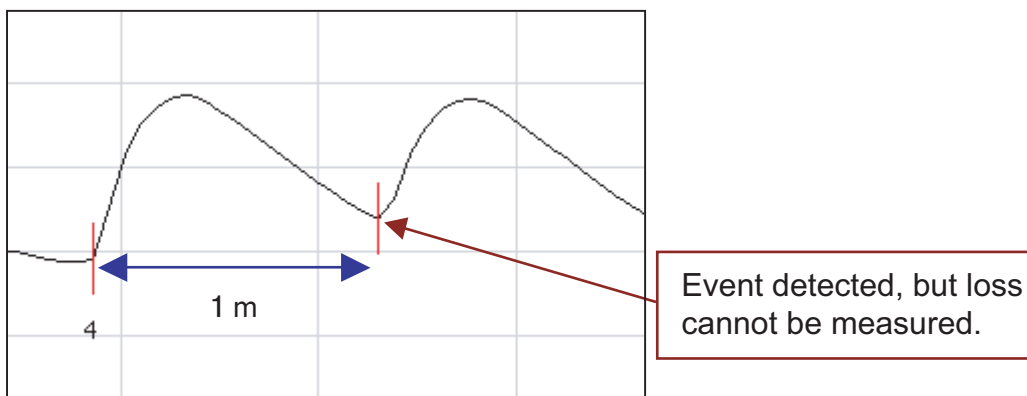


Figure 2. EXFO FTB-7000E Series with 0.8 m event dead zone

<sup>1</sup> The spatial resolving power of an optical instrument refers to its ability to distinguish detail in the structure of an object; particularly, the ability to form separate distinct images of two very small point objects which are close together.

2. **Attenuation dead zone:** This refers to the minimum distance required, after a reflective event, for the OTDR to measure a reflective or non-reflective event loss. To measure short links and to characterize or find faults in patchcords and leads, the shortest possible attenuation dead zone is best. Industry standard values range from 3 m to 10 m for this specification.

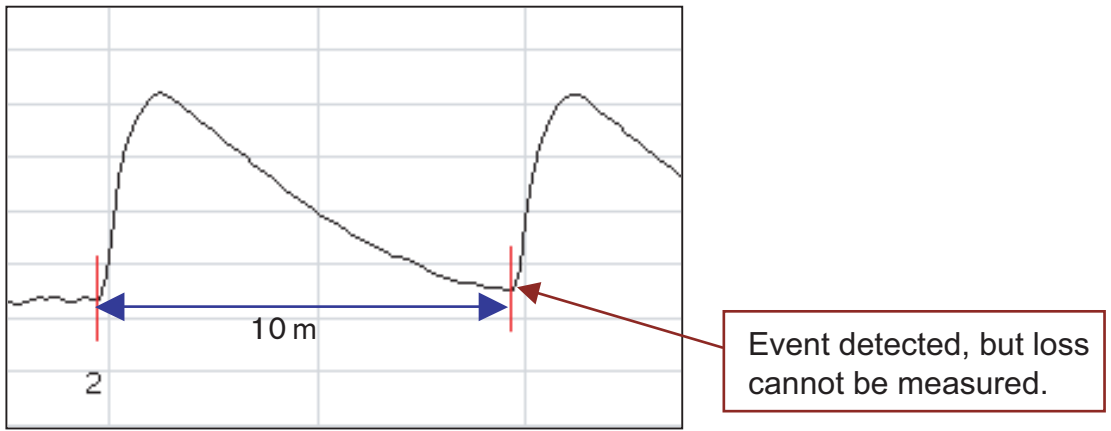


Figure 3. Common OTDR with 10 m attenuation dead zone

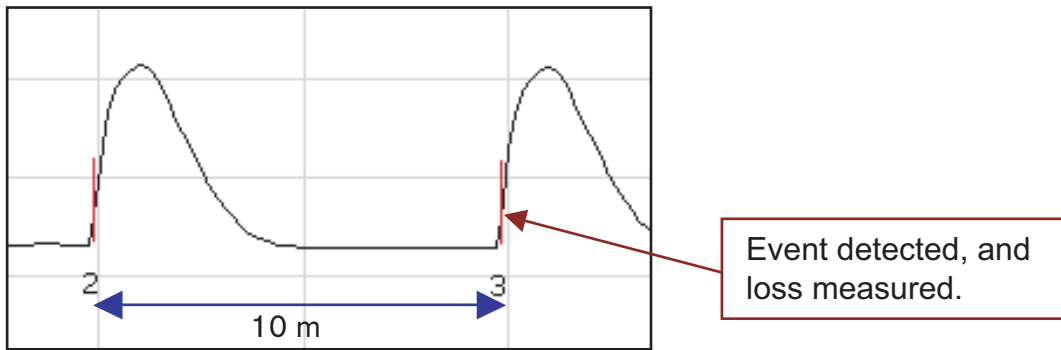


Figure 4. EXFO FTB-7000E Series with 4 m attenuation dead zone

## Sampling Resolution

Sampling resolution is defined as the minimum distance between two consecutive sampling points acquired by the instrument. This parameter is crucial, as it defines the ultimate distance accuracy and fault-finding capability of the OTDR. Depending on the selected pulse width and distance range, this value could vary from 4 cm to 5 m for EXFO's FTB-7000D series.

## Pass/Fail Thresholds

This is an important feature because a great deal of time can be saved in the analysis of OTDR traces if the user is able to set pass/fail thresholds for parameters of interest (e.g., such as splice loss or connector reflection). These thresholds highlight parameters that have exceeded a warning or fail limit set by the user and, when used in conjunction with reporting software, it can rapidly provide re-work sheets for installation/commissioning engineers.

## Report Generation

Report generation is another major timesaver, as post-processing time can be reduced by up to 90% if the OTDR has specialized post-processing software allowing fast and easy generation of OTDR reports; these can also include powerful batch processing, bidirectional analyses of OTDR traces, live templating for OTDR testing, various report templates for ORL/OTDR/CD/PMD, and summary reports for high-fiber-count cables.

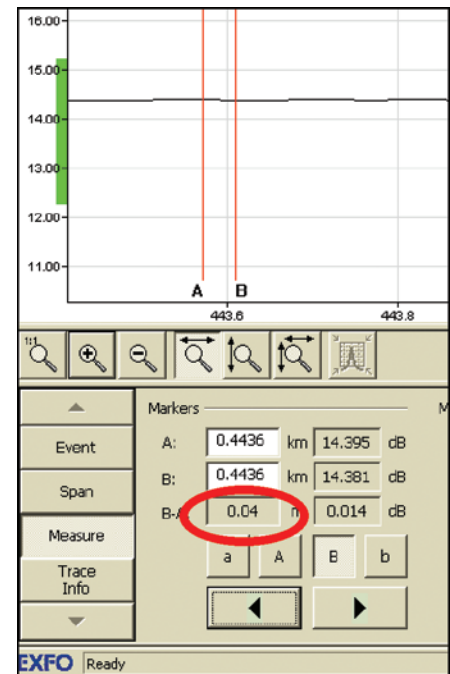


Figure 5. EXFO FTB-7000D/E Series

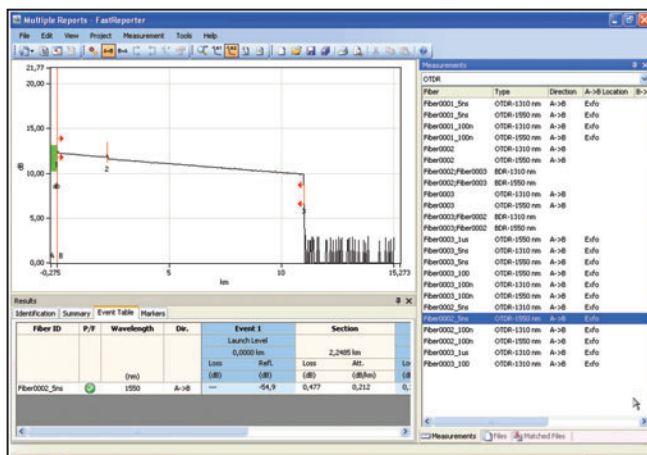


Figure 6. EXFO's Fast Reporter post-processing software

EXFO Corporate Headquarters > 400 Godin Avenue, Quebec City (Quebec) G1M 2K2 CANADA | Tel.: 1 418 683-0211 | Fax: 1 418 683-2170 | info@EXFO.com

Toll-free: 1 800 663-3936 (USA and Canada) | www.EXFO.com

<b>EXFO America</b>	3701 Plano Parkway, Suite 160 Plano, TX 75075 USA	Tel.: 1 800 663-3936	Fax: 1 972 836-0164
<b>EXFO Europe</b>	Omega Enterprise Park, Electron Way Chandlers Ford, Hampshire S053 4SE ENGLAND	Tel.: +44 2380 246810	Fax: +44 2380 246801
<b>EXFO Asia</b>	151 Chin Swee Road, #03-29 Manhattan House SINGAPORE 169876	Tel.: +65 6333 8241	Fax: +65 6333 8242
<b>EXFO China</b>	No. 88 Fuhua, First Road, Central Tower, Room 801 Futian District Shenzhen 518048 P.R. CHINA	Tel.: +86 (755) 8203 2300	Fax: +86 (755) 8203 2306
	Beijing New Century Hotel Office Tower, Room 1754-1755 No. 6 Southern Capital Gym Road Beijing 100044 P.R. CHINA	Tel.: +86 (10) 6849 2738	Fax: +86 (10) 6849 2662